

GVL 8304-K CNV control panel



Performance features

- » Compact ventilation controller
- » For controlling 24 V DC window drives
- » Up to 4 A total drive current
- » 1 ventilation group
- » Input for external controller, e.g. timer
- » Optional individual and/or control circuit ("OPEN-CLOSED")
- » Configurable ventilation safety function (storage operation "OPEN/CLOSED")
- » Optional connection to rain detectors or wind/rain detectors without an additional module
- » Surface-mounted plastic housing

Accessories

Operation elements




Modules



Sensor systems



Example of application

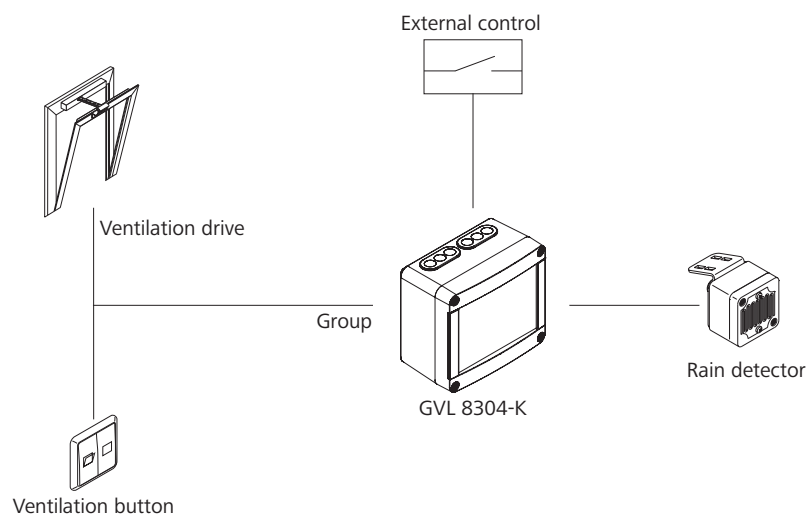

Technical data

Supply	230 V AC / 50 Hz / 160 VA
Stand-by power	4.3 W
Output	24 V DC / max. 4 A
Mode of operation	Short-time duty 20 % duty cycle
Type of protection	IP 30
Temperature range	-5 °C ... +40 °C
Housing	Plastic
Colour	Light grey (~ RAL 7035)
W x H x (D) in mm	172 x 151 x 95
Weight	2.00 kg

Design

Type	Art. No.
GVL 8304-K	30.202.10